M10 铝框门阻尼衣柜移门
Aluminum Frame Soft Close Wardrobe Sliding Door

Super Mute

描述 Description

M10-D10A
铝框门缓冲器(轻型)轻型承重15KG以下

M10-D10B
铝框门缓冲器(通用型)通用型承重15KG-25KG

M10-D10C
铝框门缓冲器(重型)重型承重25KG-40KG

Aluminum Frame Soft Close Damper (Light Weight) Weight Capacity under 15KGS
Aluminum Frame Soft Close Damper (Universal) Weight Capacity 15-25kg
Aluminum Frame Soft Close Damper (Heavy Weight) Weight Capacity 25kg-40kg



拨动钩

铝框门下滑轮

铝框门防跳上滑轮

铝框门普通上滑轮

ASR101
明装式铝材上滑轨道
Direct Style Aluminum Frame Top Sliding Rail



ASR102
明装式铝材下滑轨道
Direct Style Aluminum Frame Bottom Sliding Rail



配件型号 Accessories Item	名称 Name	数量 Quantity		配件型号 Accessories Item	名称 Name	数量 Quantity	
M10-01 单门单缓冲配普通上滑轮(通用型) Single Door Single Soft close with Normal Top Pulley (Universal)							
M10-01-01 单门单缓冲配防跳轮(通用型) Single Door Single Soft close with Anti-jumping Pulley (Universal)							
M10-D10B	铝框门缓冲器(通用型) Aluminum Frame Soft Close Damper (Universal)	1		M10-D R01	铝框门下滑轮 Aluminum Frame Lower Pulley	2	
M10-BD01	拨动钩 Hook	1		M10-BD R01	铝框门普通上滑轮 Aluminum Frame Normal Top Pulley / 铝框门防跳上滑轮 Aluminum Frame Anti-jumping Top Pulley	1	
M10-T01	铝框门 T型塑料固定件 Aluminum Frame T shape Plastic Parts	1	2	M10-XM4*18	4*18铣尾螺丝 4*18 Screw	2	
M10-LM6*30	6*30内6角自攻螺丝 6 * 30 socket head self-drilling screw	2		M10-MM4*16	4*16帽头 4*16 Cap-head Wood Screw	1	2
M10-02 单门双缓冲(通用型) Single Door Double Soft close (Universal)							
M10-D10B	铝框门缓冲器(通用型) Aluminum Frame Soft Close Damper (Universal)	2		M10-D R01	铝框门下滑轮 Aluminum Frame Soft Close Damper (Universal)	2	
M10-BD01	拨动钩 Hook	2		M10-XM4*18	4*18铣尾螺丝 4*18 Screw	4	
M10-T01	铝框门 T型塑料固定件 Aluminum Frame T shape Plastic Parts	2		M10-MM4*16	4*16帽头 4*16 Cap-head Wood Screw	2	
M10-LM6*30	6*30内6角自攻螺丝 6 * 30 socket head self-drilling screw	2					

参数说明 Parameter Specification

G=门洞/柜体内高
H=门的高度
A=缓冲器脚叉到竖框边的距离
W=门宽
M=下导轨高度,使用双向缓冲时:B大于或等于670

G=Cabinet Inner Height
H=Door Height
A=Distance Between The Buffer Fork And Mullion Edge
W=Door Width
M=Lower Slide Height, if double way soft close, then B>or = 670



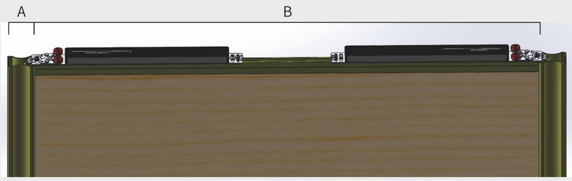

若:>6时,H=G-(35~40)-(M-6)

1-安装上下滑轮组配件且並合门框 Install The Up And Down Pulley Accessories And Combine The Frame

导入T形塑料件及合上门框
Import the T-shaped plastic parts and close the door

缓冲器安装,根据门框的偏正调节脚叉的刻度
Buffer installation, according to the frame position to adjust the scale of the positioner

单向阻尼防跳装制安装
Single way soft close anti-jumping system installation

下滑轮安装
Down Pulley Installation



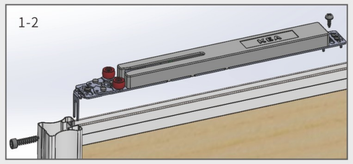





2-装上柜门和调节平行 Put On Cupboard Door And Adjust To Make Them Parallel

顺着箭头"»"方向用力收紧轮距,
再按箭头"⌃"方向用力,把门推入轨道,
再拧动下轮内六角螺丝,调整门上下水平间隙

Along the direction of arrow tightening wheel track according to the arrow direction again, push the door into the orbit to budge the Allen screw in the next round Adjust the horizontal gap of the door



调节两侧下轮的平行高度
Adjust The parallel height of the lower wheels on the side



3-安装上槽拨勾装置 The Top Hook Device Installation

距离侧板A+78cm将拨勾装置卡稳上轨内,后在长腰孔中间锁入铣尾螺丝

Put the hook into the top rail at the distance of A+78cm from side panel, then lock the screw in the middle of the long hole







4-调节拨勾装置做最佳高度 Dial The Hook Device To Do The Best Height Adjustment

拧动螺丝调整拨勾装置上下高度
注意:缓冲器接触到挡件滑轮为合适高度

Twist the screw to adjust the height of the hook device
Note: The damper come into contact with a pulley block for appropriate height





总述:
经过上面所有步骤安装好

Summary:
after all the steps above installed

1.拧动下滑轮的六角螺丝,调整门合适的水平高度,如步骤图1-4所示,
2.拉动门查看阻尼和防跳效果,如果效果不满意,在如步骤图3-3所示,
将阻尼拨勾装制的六角螺丝作微调直到满意为止。

1.Twist the hexgaon screw of lower pulley to adjust the appropriate horizontal height as shown in figure 1-4
2.Pull the door to check the effect of damping and the jumping, if the effect is not satisfied, see again the steps shown in figure 3-3
3.Adjust the hexagon screw of the hook device to make satisfaction